INSTALLATION INSTRUCTIONS

FOR ITEM 149550



CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL

INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

FIXTURE COMPONENTS

- 1. FRAME W/ LIGHT CLUSTER INSTALLED
- CANOPY ASSEMBLY W/ MOUNTING PLATE


Caution:

Fixture is OVERWEIGHT and not suitable for installation with standard Junction Box.

Be sure power is off at the main breaker box prior to installation.

Read all instructions in their entirety before beginning installation.

- 1. Carefully unpack all components and make certain that everything is on hand.
- 2. Separate the mounting plate by removing the acorn nuts and hex nuts, keep them for later.
- 3. Using customer supplied hardware, affix mounting plate to ceiling ensuring that the connection is suitable to hold a minimun of 55 lbs and that electrical supply wires remain accessible.
- 4. Screw in the running thread into the coupling attached to the frame's crossbar, simultaneously pushing the lead wires through the running thread.
- 5. Take the tube and slide it over the running thread. Put the check ring on top of it.
- 6. Take the canopy and slide over the running thread and secure all by using spider-washer and hex nut provided.
- 7. Lift the shade up and secure to the mounting plate using hex nut and acorn nuts from earlier.
- 8. Unscrew the knurled knob on the canopy to remove the wiring access panel to get access to lead wires from fixture and supply wires.
- 9. Following all local codes and procedures, make electrical connection from Fixture lead wires to Supply wires.
- 10. Screw back the wiring access panel using the Knurled knob.
- 11. Power on and ENJOY!

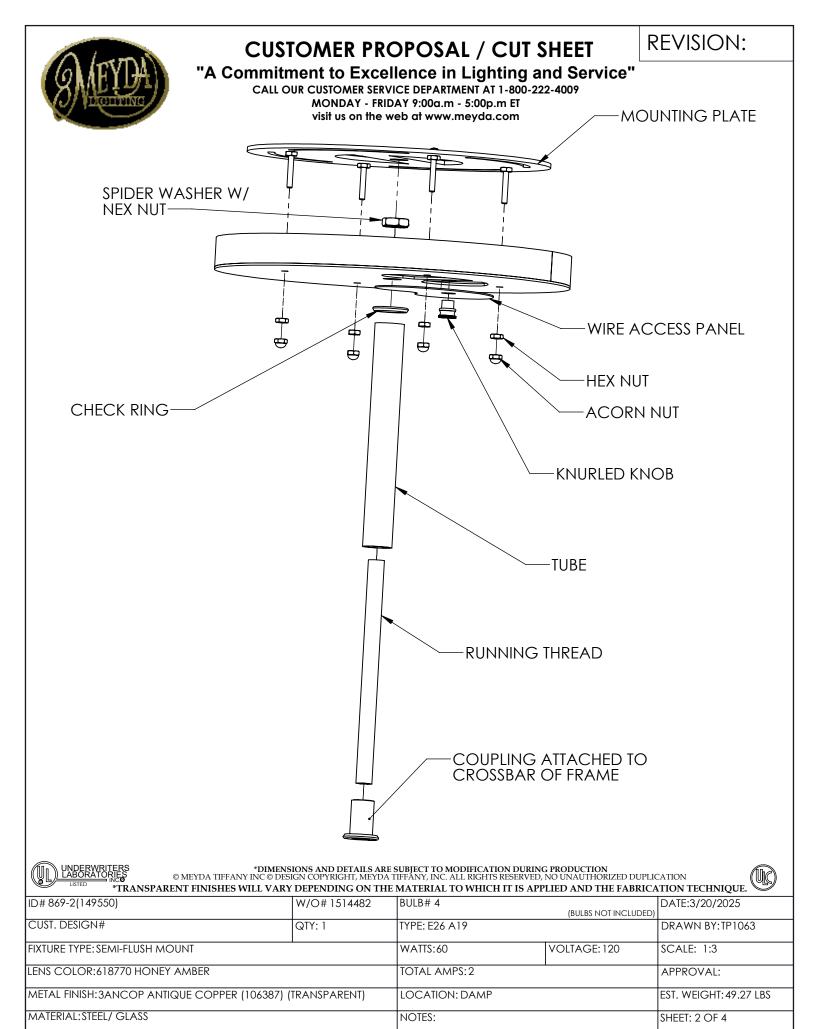






CUSTOMER PROPOSAL / CUT SHEET

"A Commitment to Excellence in Lighting and Service" CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 9:00a.m - 5:00p.m ET

visit us on the web at www.meyda.com

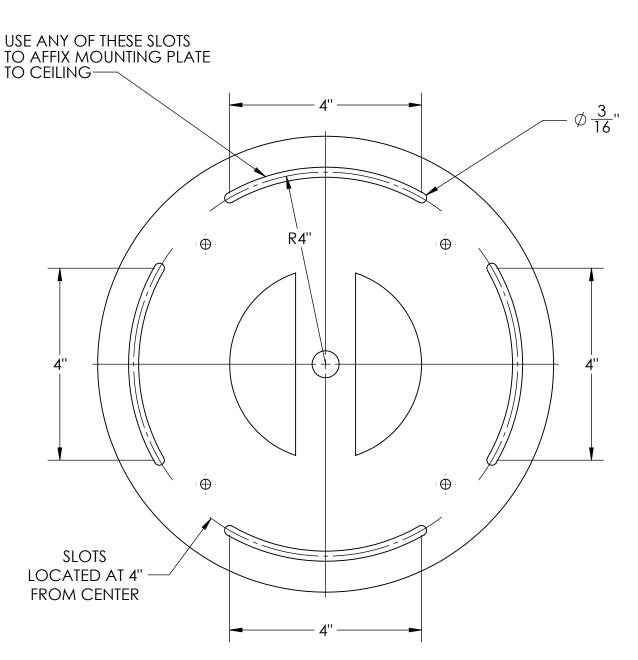

MOUNTING PLATE

UNDERWRITERS *DIMENSIONS AND DETAILS ARE SUBJECT TO MODIFICATION DURING PRODUCTION © MEYDA TIFFANY INC. © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION "STED "*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE."				
ID# 869-2(149550)	W/O# 1514482	BULB# 4	(BULBS NOT INCLUDED)	DATE:3/20/2025
CUST. DESIGN#	QTY: 1	TYPE: E26 A19		DRAWN BY:TP1063
FIXTURE TYPE: SEMI-FLUSH MOUNT		WATTS:60	VOLTAGE: 120	SCALE: 1:2
LENS COLOR:618770 HONEY AMBER		TOTAL AMPS: 2		APPROVAL:
METAL FINISH: 3ANCOP ANTIQUE COPPER (106387) (TRANSPARENT)		LOCATION: DAMP		EST. WEIGHT: 49.27 LBS
MATERIAL: STEEL/ GLASS		NOTES:		SHEET: 3 OF 4


CUSTOMER PROPOSAL / CUT SHEET

REVISION:

"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009 MONDAY - FRIDAY 9:00a.m - 5:00p.m ET

FRAME-

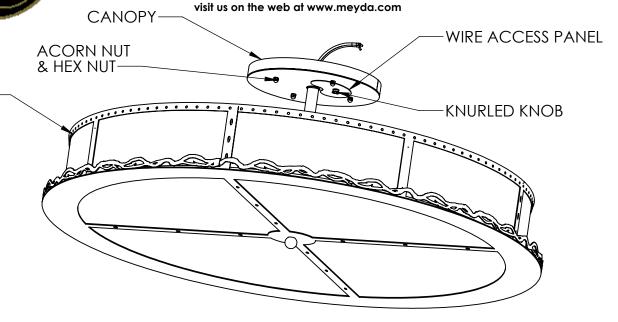

OVERALL LEAD WIRES MOUNTING PLATE ATTICAHED TO FRAME

UNDERWRITERS
LABORATORIES

© MEYDA TIFFANY INC © DESIGN COPYRIGHT, MEYDA TIFFANY, INC. ALL RIGHTS RESERVED, NO UNAUTHORIZED DUPLICATION

*TRANSPARENT FINISHES WILL VARY DEPENDING ON THE MATERIAL TO WHICH IT IS APPLIED AND THE FABRICATION TECHNIQUE.

