

# ASSEMBLY INSTRUCTIONS FOR # 184544


## IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR  
CIRCUIT BREAKER BOX BEFORE STARTING  
INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL  
PARTS BEFORE ASSEMBLY. BULBS ARE NOT  
INCLUDED

- 1.)Your fixture will arrive in four major parts: A small half ring, a large half of ring, and two arms. It does not matter which half you start with.
- 2.)Starting with the smaller half: bring the smaller half to power access port. Connect electrical wires as per your local electrical code. Screw the arm holding ring section onto your column.
- 3.)Fit the two arms onto the already placed smaller half ring sections, allowing wire/quick plugs to protrude through arm's ring holding end. Attach the arms to the column as well.
- 4.)Bring larger half to column. During this entire process you may need/want to loosen the screws that hold the larger half ring sections onto the arms, so that

you have a little more play in the parts. Once sections are ready to insert into ring holding arms, connect the quick plugs between sections. Carefully fit the sections together and secure with the arm to ring screws. Screw arms to column. If you did loosen some of the arm to ring screws: fit the rest of the sections into their appropriate places, and secure with arm to ring screws. Position your lights for maximum effect. Power on, enjoy your new light fixture!

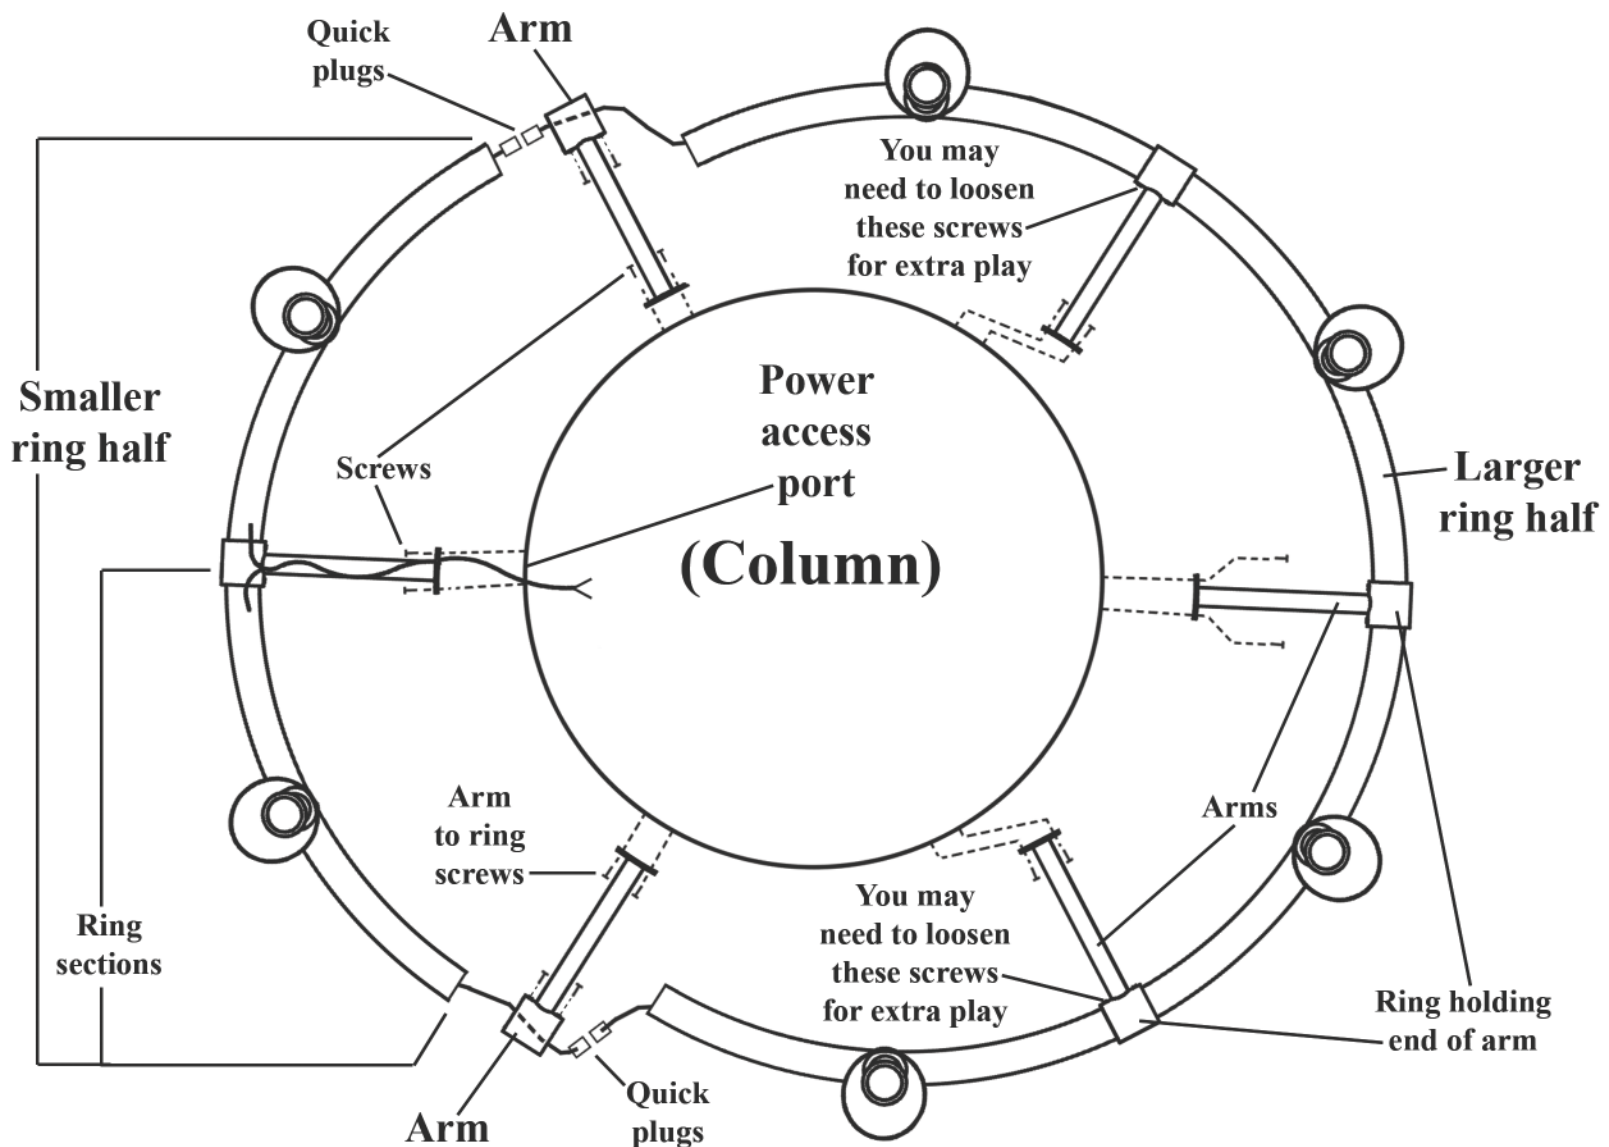

*"A Commitment to Excellence in Lighting and Service"*

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at [www.meyda.com](http://www.meyda.com)